



Technical Specification | Tank Pumps

Hi-flow 0.5L

Part No: FP1194

NEW

ASPEN-07/08

Dimensions:

Height:	125mm
Width:	205mm
Depth:	120mm
Weight:	1.4kg

Power Supply:

Pump rating: 0.4A, 230V AC
Alternative voltages available

Electrical Connections:


Brown:	Live
Blue:	Neutral
Green/yellow:	Earth
2 x Black:	Safety switch

Other Features:

- Tank capacity: 0.5L
- In-line valve to prevent siphoning back
- Pre-wired safety float switch
- Incorporated back-plate for vertical mounting
- Auto-resetting thermal cut-out to shaded pole motor
- Connecting cable: 2 metres
- Safety switch 4.0A max
- Fire retardant plastics
- 3 inlet positions: 2 x 27mm \varnothing , 1 x 20mm \varnothing push out
- Outlet size: 6mm x 10mm

Performance:

- Water flow rate: 180 litres per hour max
- 3.5 metres discharge head max

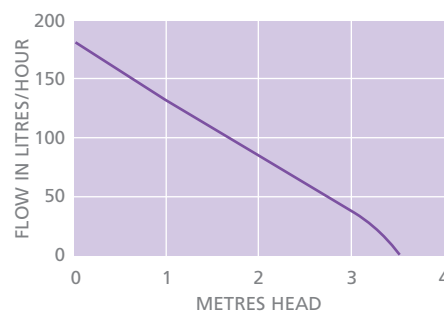

Service Guide:

Inspect the pump head regularly and change the pump head tube every 12 months or more frequently if required. Flush the pump thoroughly with anti-bacterial wash every 6 months to avoid sludge build-up in the pump. This only takes 3 minutes!



The Hi-flow 0.5L tank pump is designed to collect condensate water from refrigeration and air conditioning units. It operates automatically when the float rises and will discharge to a head of 3.5 metres.

The Hi-flow will pump a greater volume of water than the Hi-lift, but to a lesser head.

The Hi-flow 0.5L incorporates two high quality switches, activated by a single float mechanism. One switch operates the centrifugal type pump and the other is used as a high level safety switch. In the event of a pump failure this device will switch off the refrigeration unit and can simultaneously activate an optional audio and/or visual alarm.

It comes with a 2 metre long cable with push in plug which makes installation and maintenance easier.

In all cases a tank pump must be sited under the source of the condensate. It can be used on cassettes fitted with an internal lift pump and condensing boilers.

Apex Way Hailsham
East Sussex BN27 3WA
T: +44 (0)1323 848842
F: +44 (0)1323 848846
sales@aspenspumps.com

www.aspenpumps.com